
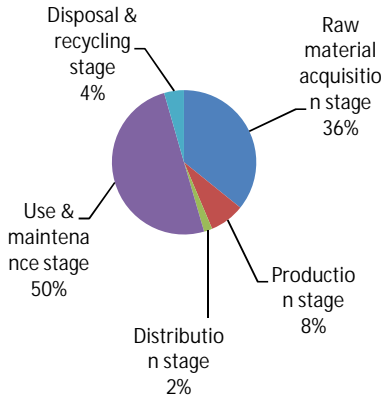


# Registration information of Carbon Footprint of Products



1. Product information			
1.1	Registration number	CR-DG01-16005	<div style="text-align: center;">  <p>1.7 Product photo</p> <p>Cassette Feeding Unit is</p> </div>
1.2	Product name	Canon imageRUNNER ADVANCE 4245 G	
1.3	Product model	Canon imageRUNNER ADVANCE 4245 G	
1.4	Main specifications of product	Multifunction Copiers Print speed (BW): 45 ppm (LTR) 565mm(W)×708mm(D)×902mm(H) Product weight: Approximately 77.9kg	
1.5	CFP quantification unit	Per unit product	
1.6	Date of release	2/17/2016	

2. Company Information		
2.1	Company name	Canon Inc.
2.2	Phone number	+81-3-3758-2111

3. CFP quantification results, and contents of CFP declaration			
3.1	CFP quantification results	1,400	kg-CO <sub>2</sub> e (CFP quantification results can be slightly different from sum of the following breakdown for rounding of fractions.)
Breakdown (by life cycle stage, by process, by flow, etc.)			
3.2	Raw material acquisition stage	500	kg-CO <sub>2</sub> e
	Production stage	110	kg-CO <sub>2</sub> e
	Distribution stage	26	kg-CO <sub>2</sub> e
	Use & maintenance stage	700	kg-CO <sub>2</sub> e
	Disposal & recycling stage	62	kg-CO <sub>2</sub> e
Value in a mark, and contents of additional info.			
Value in a mark		<Contents> <b>1,400kg</b>	<Unit for the value in a mark> Per unit product
3.3	Contents of additional info.	Calculated in the following conditions; - the standard scenario for Multifunction Device (EP type), - Print volume: 1.2 million sheets, - US market, - Printing paper is not considered.	
3.4	Remarks	—	

4. Interpretation of CFP quantification results	
4.1	<p>Interpretation of CFP quantification results</p> <ul style="list-style-type: none"> <li>· CO2 emission in Use &amp; maintenance stage is the largest as 50%. It is important to save energy during product usage and to make the life time of consumables longer. The condition in this CFP evaluation can be different from the one which the user operates under. A choice of the use condition (print mode, print conditions and so on) can reduce the CO2 emission during Use &amp; maintenance stage.</li> <li>· CO2 emission in Raw material acquisition stage is the second largest as 36%. It is also important to reduce the size and weight, and to use low environmental impact materials.</li> <li>· We evaluated the CFP with Canon's own data of raw materials weight and the general basic unit for the parts because it is difficult to collect the data for a couple of thousands of parts. Accordingly, the results may be different from the specific product specification.</li> </ul> <p>As such, please be advised that this result would be a rough estimate.</p>

5. Conditions of quantification			
5.1	Name of approved CFP-PCR Imaging input and/or output equipment	5.2	Approved CFP-PCR ID PA-DG-01
5.3	Assumptions of secondary data used	Basic secondary data v.1.01 is preferentially used. Available secondary data v.1.01 is used if the items don't correspond to basic data v.1.01.	

6. Verification information					
6.1	Verification method	CFP System certification	6.2	CFP system certification No.	SCN14002
6.3	Verification ID	CV-DG01-16005	6.4	Valid period of verification	2/4/2016

7. Program information					
7.1	Program name	Carbon Footprint Communication Program	7.2	Web site	<a href="http://www.cfp-japan.jp/">http://www.cfp-japan.jp/</a>
7.3	Program operator	Japan Environmental Management Association for Industry (JEMAI)	7.4	Address	2-1, Kajicho 2-chome, Chiyoda-ku, Tokyo 101-0044

8	Remarks	—
---	---------	---

(\*) For secondary data, refer to the following page on the CFP website.  
<http://www.cfp-japan.jp/calculate/verify/data.html>